


OVERVIEW

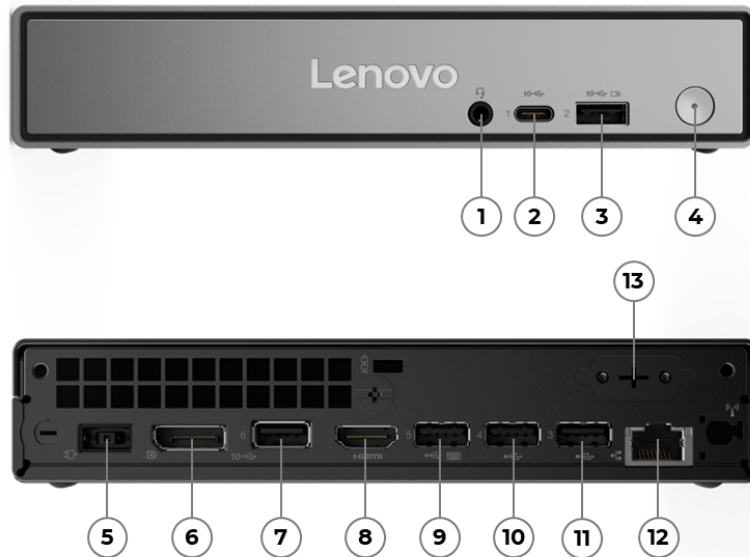

1. headphone / microphone combo jack (3.5mm)	8. HDMI 2.1 TMDs
2. USB-C (USB 10Gbps), data transfer and 5V@3A charging	9. USB-A (Hi-Speed USB), with Smart Power On
3. USB-A (USB 10Gbps), Always On and 5V@2.1A charging	10. USB-A (Hi-Speed USB)
4. Power button	11. USB-A (USB 10Gbps)
5. Power-in	12. Ethernet (1GbE, RJ-45)
6. DisplayPort 1.4b	13. Punch out port *
7. USB-A (USB 10Gbps)	

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® V Series Core Ultra 5 / 7 Processor (Series 2)

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
Core Ultra 5 226V	8 (4 P-core + 4 LP E-core)	8	P-core 2.1GHz / LP E-core 2.1GHz	P-core 4.5GHz / LP E-core 3.5GHz	8MB Intel® Smart Cache	Intel® Arc™ Graphics 130V, up to 53 TOPS	Intel® AI Boost, up to 40 TOPS	Up to 97 TOPS
Core Ultra 7 256V	8 (4 P-core + 4 LP E-core)	8	P-core 2.2GHz / LP E-core 2.2GHz	P-core 4.8GHz / LP E-core 3.7GHz	12MB Intel® Smart Cache	Intel® Arc™ Graphics 140V, up to 64 TOPS	Intel® AI Boost, up to 47 TOPS	Up to 115 TOPS

AI (Artificial Intelligence)

AI PC Category

Copilot+ PC

NPU**

- Integrated Intel® AI Boost, up to 47 TOPS
- Integrated Intel® AI Boost, up to 40 TOPS

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- No preload operating system

Graphics

Graphics**

Graphics	Type	Memory	AI TOPS (Peak)	Max Resolution	Connector	Key Features
Intel® Arc™ Graphics 130V	Integrated	Shared	53 TOPS	4096x2304@60Hz(HDMI®), 4096x2304@60Hz(DP), 1920x1200@60Hz(VGA)	1x DP 1.4b, 1x HDMI® 2.1 TMDS, 1x optional punch out port (1x VGA / 1x HDMI® 2.1 TMDS / 1x DP 1.4b)	DirectX® 12
Intel® Arc™ Graphics 140V	Integrated	Shared	64 TOPS	4096x2304@60Hz(HDMI®), 4096x2304@60Hz(DP), 1920x1200@60Hz(VGA)	1x DP 1.4b, 1x HDMI® 2.1 TMDS, 1x optional punch out port (1x VGA / 1x HDMI® 2.1 TMDS / 1x DP 1.4b)	DirectX® 12

Monitor Support

Monitor Support

Supports up to 3 independent displays via (onboard DP, onboard HDMI®, and one optional port [VGA / 2nd DP / 2nd HDMI®])

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory^[1]

16GB soldered LPDDR5X-8533 MoP, not upgradable

Memory Slots

Memory soldered to systemboard, no slots

Memory Type

LPDDR5X-8533, MoP (Memory on Package) memory

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage**Max Storage Support^[1]**

One drive, up to 1TB M.2 2280 SSD

Storage Type**

Disk Type	Interface	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	Opal 2.0

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

Removable Storage**Optical**

None

Card Reader

No card reader

Multi-Media**Audio Chip**

High Definition (HD) Audio

Speakers

Single speaker, 2W x1

Power Supply**Power Supply**^[1]**

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
90W	Adapter	89%	Autosensing
135W	Adapter	89%	Autosensing

Notes:

[1] When work with TIO monitor, an appropriate power adapter is needed. Customer may need to:

- Order a Tiny for TIO MT (13HT, 13HU) models
- Or order an additional 135W power adapter, if original power adapter is 90W or 65W

For detailed information, please refer to [ThinkCentre® neo 50q Gen 6 Adapter Matrix](#)**DESIGN****Input Device****Keyboard****

- Lenovo® Calliope Keyboard (USB connector), black
- Wireless EOS Keyboard, black
- No keyboard

Mouse**

- Lenovo® Calliope Mouse (USB connector), black
- Lenovo® Fingerprint Mouse (USB connector), black

- Wireless EOS Mouse, black
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)^[1]

Models	Dimensions
Tiny only (without rubber feet)	179 x 182.9 x 34.5 mm (7.05 x 7.2 x 1.36 inches)
Tiny only (with rubber feet)	179 x 182.9 x 36.5 mm (7.05 x 7.2 x 1.44 inches)

Packaging Dimensions (WxDxH)**

- Tiny without keyboard: 242 x 250 x 187 (9.52 x 9.84 x 7.36)
- Tiny with EOS keyboard: 532 x 250 x 128 mm (20.94 x 9.84 x 5.04 inches)
- Tiny with Calliope keyboard: 492 x 250 x 128 mm (19.37 x 9.84 x 5.04 inches)

Weight^[2]

Around 1.1 kg (2.43 lbs)

Packaging Weight**

- Tiny without keyboard: 2.6 kg (5.7 lbs)
- Tiny with EOS keyboard: 3.4 kg (7.5 lbs)
- Tiny with Calliope keyboard: 3.6 kg (7.9 lbs)

Case Color

Raven black

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

EOU

- (Optional) toolless chassis open (toolless chassis screw required) and toolless M.2 SSD assembly / removal
- No support

Stand

- Vertical stand
- No stand

Mounting

- Supports VESA mount 100mm
- None

Others

(Optional) Power adapter cage

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

WLAN + Bluetooth[®]**^[1]

- MediaTek Wi-Fi[®] 6 MT7920, 802.11ax 2x2 Wi-Fi[®] + Bluetooth[®] 5.2, M.2 card
- Realtek[®] Wi-Fi[®] 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi[®] + Bluetooth[®] 5.2, M.2 card
- Realtek[®] Wi-Fi[®] 7 RTL8922AE, 802.11be 2x2 160MHz Wi-Fi[®] + Bluetooth[®] 5.4, M.2 card
- No WLAN and Bluetooth[®]
- MediaTek Wi-Fi[®] 7 MT7925, 802.11be 2x2 160MHz Wi-Fi[®] + Bluetooth[®] 5.4, M.2 card

Onboard Ethernet

Gigabit Ethernet, Realtek[®] RTL8111K-CG, 1x RJ-45

Optional Ethernet

- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45
- No optional Ethernet

Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

Ports^[1]

Front Ports

- 1x USB-C® (USB 10Gbps / USB 3.2 Gen 2), with data transfer and 5V@3A charging
- 1x USB-A (USB 10Gbps / USB 3.2 Gen 2), with Always On and 5V@2.1A charging
- 1x headphone / microphone combo jack (3.5mm)

Rear Ports

- 2x USB-A (Hi-Speed USB / USB 2.0), one supports Smart Power On
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2)
- 1x HDMI® 2.1 TMDS
- 1x DisplayPort™ 1.4b
- 1x Ethernet (GbE RJ-45)
- 1x Power connector

Optional Rear Ports

Punch out port (one of VGA / HDMI® 2.1 TMDS / DisplayPort™ 1.4b / serial / 2.5GbE RJ-45)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt™ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

Chassis intrusion switch

BIOS Security

- Absolute persistence module
- Administrator password
- Boot sequence control
- Boot without keyboard and mouse
- Configuration change detection
- Cover tamper detected
- Intel® BIOS guard
- Individual USB port disablement
- Hard disk password
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Never crash Self-healing
- Secure boot

- Secure wipe
- More BIOS security features, please visit [BIOS Simulator](#)

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 1-year limited onsite service

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 9.0
- (Optional) EPEAT™ Gold Registered
- RoHS compliant
- TCO Certified, generation 10

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

Other Certifications

Other Certifications

(Optional) TÜV Rheinland® Ultra Low Noise

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. **LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



Copilot+PC

intel



Copilot+PC

intel



Copilot+PC

intel




Copilot+PC

intel



Copilot+PC

intel



Copilot+PC

intel